



WPPS12BKO

Metalclad Grey Wall Switches

- Unique patented LOOP terminal to allow Neutral looping at the switch.
- 'X' rated - No need to derate for fluorescent loads.
- Clear terminal markings: 1-way L1, 2-way L2
- Complies with IEC 60669-1, a.c. only.
- Two way switches can be wired either 1 way or 2 way.
- Capacity of each terminal 2 x 4.0mm² conductors.



WPPS22BKO



WPPS32BKO


	Pack/ Qty	Cat. Ref.
20A Double Pole Switch cw LED & Flex Outlet	10	WPDP84FONBKO
10AX 1 Gang 2 Way Wall Switch	10	WPPS12BKO
10AX 2 Gang 2 Way Wall Switch	10	WPPS22BKO
10AX 3 Gang 2 Way Wall Switch	10	WPPS32BKO



WPSS81BKO

Metalclad Grey Socket Outlets

- Unique patented 3 part safety shutter.
- Twin socket comes with twin earth as standard.
- Capacity of each terminal: 5 x 2.5mm² conductors switched; 4 x 2.5mm² unswitched
- Complies with BS 1363-2: 13A SSO, BS 546 & MS 1577: 15A SSO
- All terminal screws grouped in-line and upward facing for ease of installation.
- Double pole switching mechanism on switched sockets.
- Clear printed and engraved terminal markings.



WPSS82BKO

	Pack/ Qty	Cat. Ref.
1 Gang Double Pole Switched Socket	10	WPSS81BKO
1 Gang Double Pole Switched Socket cw LED	10	WPSS81NBKO
2 Gang Double Pole Switched Socket	5	WPSS82BKO
2 Gang Double Pole Switched Socket cw LED	5	WPSS82NBKO
15A Double Pole Switched Socket	10	WPSS115BKO



WPSSU83FONBKO

Metalclad Grey 13A Fused Connection Units

- Complies with BS 1363-4.
- Cable clamp accommodates up to 1.5mm² flexible cord.
- Single screw fast fix cable clamp.
- Available with LED light indicator in rocker.
- All terminal screws upward facing for ease of installation.
- Clearly printed terminal markings.
- Capacity of each terminal 2 x 6.0 mm² conductors.

	Pack/ Qty	Cat. Ref.
13A FCU UnSwitched cw Flex Outlet	10	WPSU83FOBKO
13A FCU Switched cw Flex Outlet	10	WPSSU83FOBKO
13A FCU Switched cw LED & Flex Outlet	10	WPSSU83FONBKO

Sollysta Metalclad Accessories



WPB140KO

Metalclad Grey Accessories

	Pack/ Qty	Cat. Ref.
Single Backbox	10	WPB140KO
Twin Backbox	5	WPB240KO
Two Row Twin Backbox	5	WPB6840KO
Single Blank Plate	10	WPP1BKO
Twin Blank Plate	5	WPP2BKO

Complies with

- 13A socket outlets comply with BS 1363-2 & SS 145 part 2
- 15A socket outlets comply with BS 546 & SS 472
- Fused connection units comply with BS 1363-4
- IP66 rating conforms to IEC/ BS EN 60529

- Robust and rugged enclosures designed to withstand the elements.

Socket outlets

- Unique double hinge allows lid to fully open through 180°.
- Fixing point for padlock.

• Cable entries:

Cable entries qty & diameter (mm)

Box size	Side	Back
90 x 90	4 x 20	1 x 20 & 1 x 25
103 x 116.5	4 x 20	1 x 20 & 1 x 25
164 x 116.5	6 x 20	1 x 20 & 1 x 25



WXPPS12



WXPPS22



WXPSS81



WXPSS82

Description	Size	Pack qty.	Cat. Ref.
Wall switches			
10AX 1 gang 2 way switch	90 x 90	1	WXPPS12
10AX 2 gang 2 way switch	90 x 90	1	WXPPS22
20AX double pole 1 gang 1 way switch	90 x 90	1	WXPD84
20AX double pole 1 gang 1 way switch with neon	90 x 90	1	WXPD84N
20AX double pole 2 gang 1 way switch	90 x 90	1	WXPD842
10A 1 gang bell push switch	90 x 90	1	WXPPS12B
Socket outlets			
13A 1 gang unswitched socket	103 x 116.5	1	WXPS81
13A 1 gang double pole switched socket	103 x 116.5	1	WXPSS81
13A 1 gang double pole switched socket with neon	103 x 116.5	1	WXPSS81N
13A 2 gang unswitched socket	164 x 116.5	1	WXPS82
13A 2 gang double pole switched socket	164 x 116.5	1	WXPSS82
13A 2 gang double pole switched socket with neon	164 x 116.5	1	WXPSS82N
15A 1 gang double pole switched socket	103 x 116.5	1	WXPSS115
Fused connection unit			
13A DP switched fused connection unit with flex outlet	103 x 116.5	1	WXPSSU83FO
13A unswitched fused connection unit with flex outlet	103 x 116.5	1	WXPSU83FO




Socket with USB charger

The socket equipped with two 2.4A USB chargers, which intelligently adapt to mobile devices with different power consumptions, ensure the charging safety and efficiency.

Multi-gang frame

Conjoined switch combination, convenient and beautiful.

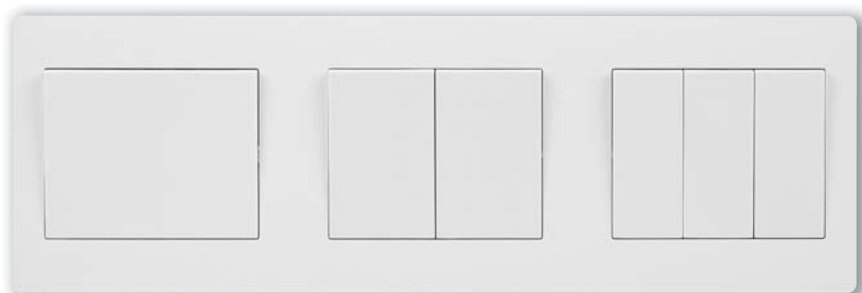

Color options

Pursuing vibrancy and elegance with optional colors, white, aurora silver, knight black, shine the style and good taste.




High 16AX rating

The rated current of switch is 16AX, which meets the requirements of using electricity safely in all aspects.

USB protected against surge voltages

Protection against transient surge voltage for the USB circuits is provided at 2500Vac, 2.5 times higher than IEC requirement. USB output maintains at 5Vdc to ensure optimum safety for users and equipment being charged.



Shutter

Having safety awareness all the time comes from the care for family members. The socket panel is designed with child lock, preventing unintended access by young children.